
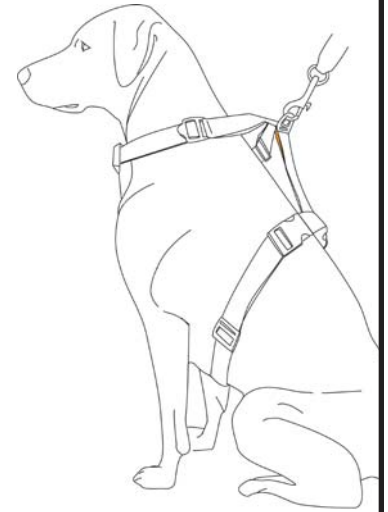


AUTO  
**Zip Line**  
WITH HARNESS

## INSTALLATION & CARE


### SAFETY/WALKING HARNESS INSTRUCTIONS

1. Place upper strap (with black D-ring) around pet's neck
2. Place 2 lower straps around pet's chest and behind front legs
3. Fasten side release buckles on both sides
4. Adjust upper and lower straps to fit comfortably.
5. Attach leash hook to black D-ring

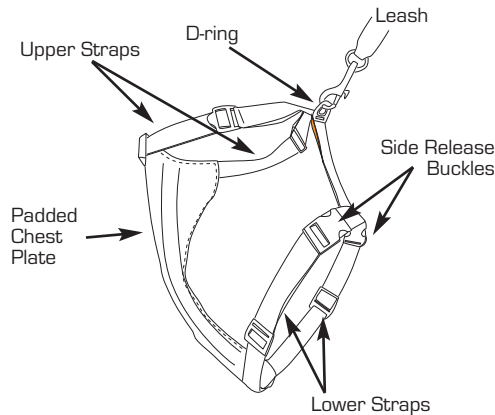



### LEASH/TETHER INSTRUCTIONS

1. Using the harness clip located at the end of the leash, attach to pet harness using the black D-ring. To stop the Zip Line Tether Clip from moving while using the leash slip the Clip Loop (black with orange trim) around the Zip Line Tether Clip located mid-way up the leash.
2. For a more controlled walking leash, hook both Clips onto the black harness D-ring.

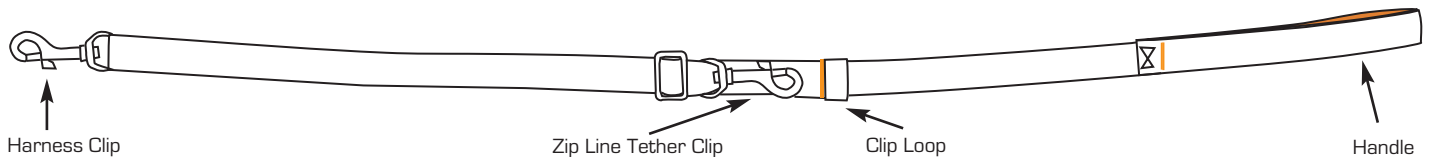


### ZIP LINE INSTALLATION

1. Grasp one side of the auto zip line, hold with the orange seam and bristle textured Velcro strip facing down
2. Loop the fabric strip up and over the interior car handle, then down through the large D-ring slot
3. Forming a tight loop, secure tightly using the velcro strips
4. Perform same procedure on the opposite interior car handle
5. Adjust both sides until you reach desired tension, cable should be tight

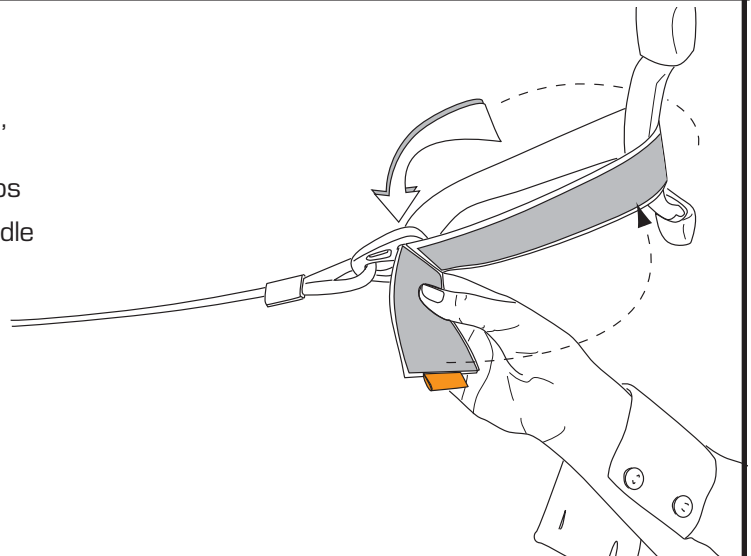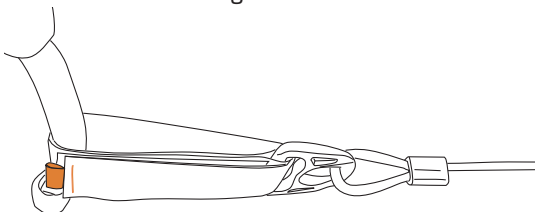

## USING THE AUTO ZIP LINE WITH HARNESS & LEASH

1. With the harness and leash properly adjusted situate the pet onto the car seat
  2. Un-loop the leash hook located midway up the leash and hook onto the zip line. To keep the pet on one side of the car, or when traveling with multiple pets, attach the leash hook to the metal loop located at each end of the tension cable
  3. With dog in a suitable traveling position adjust the height of the tether to desired height; comfortable, yet secure
  4. Never travel with a passenger in the rear of the car when the Auto Zip Line is installed
- \* **Pets should not be left unattended in vehicle at anytime**

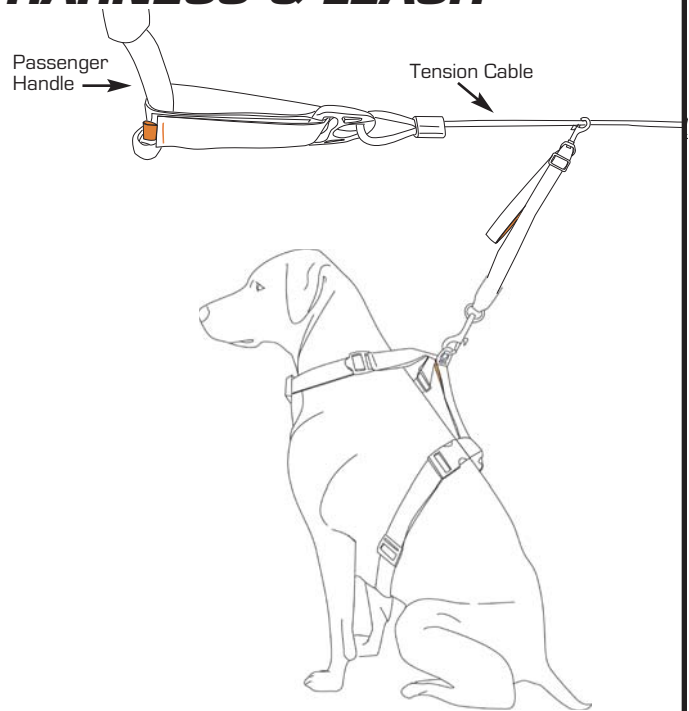

## ALTERNATE WAYS TO SECURELY ATTACH PET IN HARNESS

1. Seat Belts - Hook both of the leash hooks onto the D-ring forming a large loop with the leash. Thread the seat belt through this loop and attach seat belt into the buckle (**Picture 1**)
  2. Cargo Hooks (SUV, Minivan and Station Wagon) - Use the Zip Line Tether Clip to fasten your pet in its harness to cargo hooks located in the rear of the vehicle (**Picture 2**)
- \* Only use secure, OEM car manufactured and installed parts on your vehicle to attach the Auto Zip Line to.



## WASHING INSTRUCTIONS FOR HARNESS

- Brush off loose dirt with a dry brush.
- As needed, wipe off with a damp sponge and mild soap.
- Rinse if possible. Use cold water and a sponge or rinse in a tub without soap.
- Machine wash in front-loading unit (DO NOT use machine with agitator) with cold water and mild soap (Ivory Flakes, Woolite, Sport Wash, Etc.) Not detergents.
- Rinse thoroughly to eliminate soap residue.
- Lay flat to dry.



For additional information:

877.847.3868 : [www.Kurgo.com](http://www.Kurgo.com) : [info@Kurgo.com](mailto:info@Kurgo.com)

**kurgo**  
.com